





PCB Connector — TLP series (Pin header)— TLPHDC-007V-XXP-HT




图示(Pic. shown) : TLPHDC-007V-10P-HT-K

General.	PCB Connector Rated : 160V,10A
	Single row, 3.50 mm pitch, 04-48 Pole
	Orientation:90°(plug-in to board)

认证 (Approval) :Applying

技术参数 Technical Data	UL standard			IEC standard		
	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
UL应用组别(UL Application group)	UL Application group			III / 3		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 2	II / 2	II / 2
额定电压(Rated voltage)	300V	--	300V	--	160V	--
额定电流(Rated current)	8A	--	8A	--	10A	--
额定连接容量(Rated connection capacity)	--			--		
绝缘材料(Insulation Material)	--			PA9T/LCP UL94 V-0		
电流承载部件材料和镀层(Material & Plating of Current carrier)	--			Copper alloy , Tin plated		
接线弹片材料(Material of Clamp spring)	--			--		
绝缘电阻(Insulation Resistance)	--			500MΩ or more at DC500V		
耐电压(1分钟)(Withstanding Voltage/1Min)	--			1600V		
额定冲击电压(Rated surge voltage)	--			--		
接线螺丝(Wire clamp unit Screw), 最大扭矩(torque Max.)	--			--		
固定螺母(Mounting Nut), 扭矩(torque)	--			--		
剥线长度(Wire stripping length)	--			--		
使用温度(Operating temperature)	--			-40°C up to +130°C		
焊接方式(Soldering recommend)	Wave soldering & Reflow soldering (THR) capable					

订购方式(How to order)

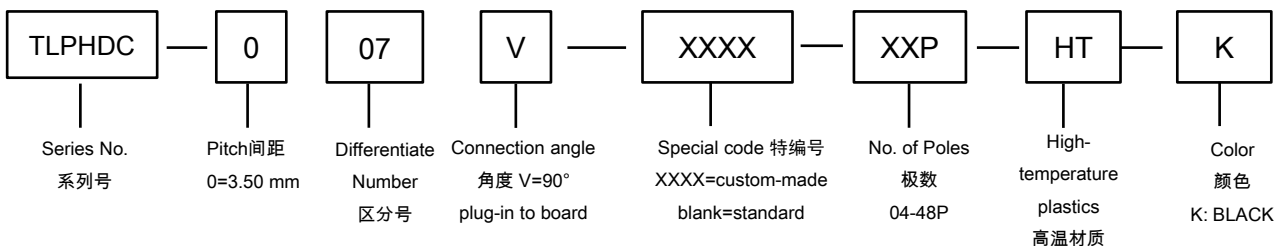

Web:www.china-tianli.com

TEL:+86-574-6347-9600,6389-6436

Mail : sale@china-tianli.cn

地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号


ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China

■ 编码片 Coding key




P/N:
TLPCK-001-S

■ 插头 (Female Connector)



P/N : TLPS-007
Wiring orientation :
180°(wire to plug-in)
Rated : 160V,10A , 1.5mm²
Spring clamp unit.



P/N : TLPSD-007
Wiring orientation :
180°(wire to plug-in)
Rated : 160V,10A , 1.5mm²
Spring clamp unit.